


type number	for width of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
<b>VKR 50_S</b>	50	50	453	12	0,55	0,28	🔥🔥
<b>VKR 50_F</b>					0,8	0,47	🔥🔥
<b>VKR 75_S</b>	75	75	478	12	0,55	0,38	🔥🔥
<b>VKR 75_F</b>					0,8	0,64	🔥🔥
<b>VKR 100_S</b>	100	100	503	12	0,55	0,49	🔥🔥
<b>VKR 100_F</b>					0,8	0,82	🔥🔥
<b>VKR 150_S</b>	150	150	553	12	0,55	0,72	🔥🔥
<b>VKR 150_F</b>					0,8	1,21	🔥🔥
<b>VKR 200_S</b>	200	200	603	12	0,8	1,41	🔥🔥
<b>VKR 200_F</b>					0,8	1,64	🔥🔥
<b>VKR 300_S</b>	300	300	703	12	1,0	2,81	🔥🔥
<b>VKR 300_F</b>					1,0	3,27	🔥🔥
<b>VKR 400_S</b>	400	400	803	15	1,0	4,04	🔥
<b>VKR 400_F</b>					1,0	4,68	🔥
<b>VKR 500_S</b>	500	500	903	15	1,0	5,40	🔥
<b>VKR 500_F</b>					1,0	6,27	🔥
<b>VKR 600_S</b>	600	600	1003	15	1,0	6,30	🔥
<b>VKR 600_F</b>					1,0	7,30	🔥

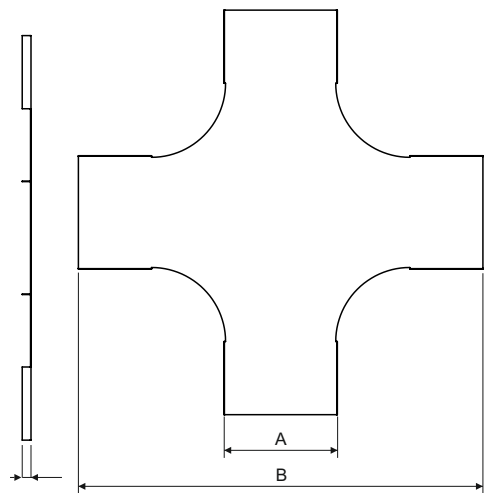

product description: This cover is used to cover the cross-over.  
To fix the cover use 6 pcs of cover fixtures VU or NUV.  
These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm  
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

psales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90  
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

- 🔥 products are approved for standard constructions
- 🔥 products are approved for non-standard constructions

storage: ČSN EN 60721-3-1

